

Integral Bottle Coolers

BC600

Height	900mm
Length	600mm
Depth	500mm
Net Capacity	109litres

Standard Features:

- >> Integral Cabinets - simple plug-in operation
- >> Front ventilated
- >> Adjustable wire shelves
- >> Excellent interior lighting
- >> Standard colour black



BC900

Height	900mm
Length	900mm
Depth	500mm
Gross Capacity	139 litres

Standard Features:

- >> Integral Cabinets - simple plug-in operation
- >> Front ventilated
- >> Adjustable wire shelves
- >> Excellent interior lighting
- >> Sliding or hinged doors
- >> Standard colour black



BC1335

Height	900mm
Length	1335mm
Depth	500mm
Gross Capacity	232 litres

Standard Features:

- >> Integral Cabinets - simple plug-in operation
- >> Front ventilated
- >> Adjustable wire shelves
- >> Excellent interior lighting
- >> Sliding or hinged doors
- >> Standard colour black




BC1980

Height	900mm
Length	1980mm
Depth	635mm
Gross Capacity	675 litres

Standard Features:

- >> Integral Cabinets - simple plug-in operation
- >> Double glazed self closing glass doors
- >> Adjustable shelving
- >> Internal lighting
- >> Stainless steel interior base

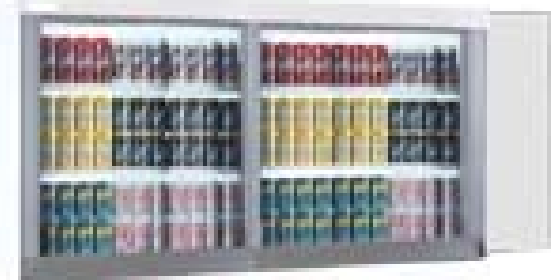

Back Bar Range

Bars and restaurants profit from increased efficiency and impulse sales created by the excellent display capabilities of the low maintenance, sleek and stylish SKOPE Backbar horizontal range of beverage chillers that complement front-of-house.



Specifications:

- R134a refrigerant (CFC and HCFC free)
- Insulation 50mm cyclo-isopentane foam (CFC, HCFC and HFC free)
- Exterior white or black powder coat on galvanised steel or 430 stainless steel (back galvanised only)
- Interior white or black powder coat on galvanised steel or 430 stainless steel (floor 340 s/s)
- Interior fluorescent lighting
- Double glazed low emission toughened safety glass
- Two adjustable shelves per door
- Available with swinging or sliding doors, or pass through (sliding front, swing rear)
- Heater wire in cabinet fascia
- Thermometer display fitted
- System overheat protection
- Mean operating temperature +1°C to +4°C in 32°C ambient
- 230-240volts AC 50Hz single phase power supply
- No plumbing required for integral models
- Height 920mm without castors or legs
- Depth 600mm
- Supplied on pallet with adjustable legs (110-140mm) as standard.
- Board and stretch wrap packaging

Backbar range options:

- Additional shelves
- Cyclone unit on right
- Door lock kit
- Tropical specification (swing door models only)
- Castors instead of legs
- Rear swing or sliding doors
- Solid swing doors
- Interior light switch (glass doors)
- Available with optional 25mm stainless steel worktop (add 25mm to height)

Model	Doors	Width	Volume	Unit
BB380i-2SW (shown)	2 swing	1500mm	380 litres	Integral
BB580i-3SW	3 swing	2060mm	580 litres	Integral
BB780i-4SW	4 swing	2620mm	780 litres	Integral
BB380i-2SL	2 Sliding	1500mm	380 litres	Integral
BB580i-3SL	3 Sliding	2060mm	580 litres	Integral
BB780i-4SL	4 Sliding	2620mm	780 litres	Integral
BB380r-2SW	2 swing	1500mm	380 litres	Remote
BB580r-3SW	3 swing	2060mm	580 litres	Remote
BB780r-4SW	4 swing	2620mm	780 litres	Remote
BB380r-2SL	2 Sliding	1500mm	380 litres	Remote
BB580r-3SL	3 Sliding	2060mm	580 litres	Remote
BB780r-4SL	4 Sliding	2620mm	780 litres	Remote



Counterline Range



Some of the features of this new range:

- Fan forced airflow ducted throughout the cabinet - efficient, consistent and even product temperatures
- Reversible condenser fan motor to self-clean the condenser of dust and dry particles during compressor off cycle by reversing air-flow direction
- Designed for positioning below existing worktops, the cabinet dimensions are compatible with standard worktop heights and depths
- Can be fitted with 20mm high 304 stainless steel worktop with 65mm or 50mm fascia to create independent work stations, worktops are designed to be simply removed or replaced
- The new electronic digital display, refrigeration control serves two functions, the control of the system to ensure the correct temperature is maintained and to provide protection for the refrigeration equipment with servicing alarms, also available with optional HACCP controller
- Available with glass swing doors, solid swing doors or glass sliding doors, self-closing and self-sealing as standard - greater energy efficiency and convenience
- Full width, fluorescent T5 specification lighting - T5 lighting consumes less power and is much brighter
- Height (without legs or castors) 725mm (745 with worktop).
- Depth 680mm (700 with worktop)

Model	Doors	Width	Volume	Unit
CL400-2G (shown)	2 glass	1600mm	390 litres	Integral
<u>CL600-3G</u>	3 glass	2210mm	600 litres	Integral
<u>CL800-4G</u>	4 glass	2820mm	810 litres	Integral
CL400-2S	2 solid	1600mm	390 litres	Integral
CL600-3S	3 solid	2210mm	600 litres	Integral
CL800-4S	4 solid	2820mm	810 litres	Integral
CL400r-2G	2 glass	1455mm	390 litres	Remote
CL600r-3G	3 glass	2065mm	600 litres	Remote
CL800r-4G	4 glass	2675mm	810 litres	Remote
CL400r-2S	2 solid	1455mm	390 litres	Remote
CL600r-3S	3 solid	2065mm	600 litres	Remote
CL800r-4S	4 solid	2675mm	810 litres	Remote

Counter Slimline Range



Specifications:

- R134a refrigerant (CFC and HCFC free)
- Insulation 50mm cyclo-isopentane foam (CFC, HCFC and HFC free)
- Exterior white powder coat on galvanised steel (base/top galvanised only) or 430 stainless steel
- Interior white powder coat on galvanised steel or 430 stainless steel
- Floor 304 stainless steel
- Self closing & self sealing swing doors
- Glass doors double glazed toughened safety glass
- Interior lighting on glass door models
- Solid doors stainless steel with ergonomic handles (no interior lighting)
- Heater wire in cabinet fascia
- Two adjustable shelves per door
- Delivered on a pallet with adjustable legs 150-180mm (standard)
- System overheat protection
- Mean operating temperature +1°C to +4°C in 32°C ambient
- Thermometer display fitted
- 230-240volts AC 50Hz single phase power supply
- Urethane treated evaporator coil
- No plumbing required for integral models
- Height without legs or castors 750mm integral, 730mm remote
- Depth Slimline 600mm
- Board and stretch wrap packaging

Model	Doors	Width	Volume	Unit
CC275-2G (shown)	2 glass	1601mm	275 litres	Integral
CC435-3G	3 glass	2216mm	435 litres	Integral
CC595-4G	4 glass	2831mm	595 litres	Integral
CC275-2S	2 solid	1601mm	275 litres	Integral
CC435-3S	3 solid	2216mm	435 litres	Integral
CC595-4S	4 solid	2831mm	595 litres	Integral
CC275r-2G	2 glass	1223mm	275 litres	Remote
CC435r-3G	3 glass	1838mm	435 litres	Remote
CC595r-4G	4 glass	2453mm	595 litres	Remote
CC275r-2S	2 solid	1223mm	275 litres	Remote
CC435r-3S	3 solid	2838mm	435 litres	Remote
CC595r-4S	4 solid	2453mm	595 litres	Remote

Counter range options (both Slimline and Gen2):

- Sliding doors
- Additional shelves
- Cyclone unit on right
- Stainless steel worktop
- Door lock kit
- Low emission glass doors
- Tropical specification (glass doors) - Slimline only
- Interior lighting (solid doors) - standard Gen2
- Interior light switch (glass doors) - standard Gen2
- Castors instead of legs

Taylor made back bar Bottle Chillers & Pass through

Cabinets manufactured to suit your space

Double glazed

Sliding or swing doors

Rear loading option

Complete with shelves

Installation available by our own staff

Price on application

